

Brooks Brothers TRAILERS

PO Box 358, Winfield, MO 63389 • 636-566-6100 • 866-462-7665 • 636-668-6312 fax

PT122-6K

Specifications & Options List



PICTURED WITH OPTIONAL REEL STANDS

Brooks Brothers Trailers ...



A wise decision



PT122-6K, COMBINATION POLE TRAILER

STANDARD EQUIPMENT AND SPECIFICATIONS

MODEL	PT122-6K
CAPACITY	<ul style="list-style-type: none"> • 13,500 lbs. GVWR - Calculated at 15% Weight Transfer to Tow Vehicle • 10,200 lbs. Load Capacity
DIMENSIONS	<ul style="list-style-type: none"> • Length Adjustments: 20' / 25' / 30' • Cargo Bed: 12'L x 64"W x 15"H • Overall Width: 86" • Bolster Height: 42" (45" with Optional Removable Bolsters)
AXLES	<ul style="list-style-type: none"> • 6000 lbs. Tandem Dexter Straight Axles - (Optional Axles: 7K & 8K) • 12" x 2" Electric Brakes on All Wheels • 3500 lbs. 5 Leaf Slipper Springs, • Reinforced Spring Hangers with 3" Structural C-Channel Crossmembers • (4) four - ST235/85R16 LR-E Tires, Capacity 3,042 lbs. each, Single Wheel Application • (4) four - 16" x 6" Single Wheels (8 Hole on 6 1/2" Bolt Circle) • (1) Pair - Mud Flaps • (1) Pair - Fender Mounted Wheel Chock Holders (Wheel Chocks Not Included)
POLE BOLSTERS	<ul style="list-style-type: none"> • Front Bolster: 45"W Removable (Mounted on Extendable Tongue) • Center Bolster: 64"W with Pole Stops (Built into Front Wall of Cargo Bed) • Rear Bolster: 64" W with Pole Stops (Built into Tailgate - 2"x2" Tubular Construction) • (4) four - Heavy Duty Ratchet Type Winch Binders with Breaker Bar • (4) four - 15' L x 4" W x 12000 lbs. Nylon Straps
REMOVABLE REEL RACKS	<ul style="list-style-type: none"> • (1) pair - 36"H Standard Removable Reel Stands, 2200 lbs. Capacity • (1) pair - 3" Receiver Tubes, Mounted inside Cargo Bed Sidewalls (Reel Bar Not Included - See Options List)
TONGUE & HITCH	<ul style="list-style-type: none"> • 6" x 3" x 1/4" Wall Extendable Tongue with Lubricated Steel Wear Pads • 6-Position Adjustable Hitch Plate • 2 1/2" Lunette Eye, 35000 lbs. Capacity • 3/8" x 36"L Galvanized Safety Chains with Safety Hooks and Anchor Shackles
A-FRAME & JACK	<ul style="list-style-type: none"> • 6" x 2" Tubular Steel A-Frame • Fixed Binkley, Model 48000 Drop Leg Jack, 12,000 lb. Static Load Capacity
MAIN FRAME	<ul style="list-style-type: none"> • 6" x 2" Tubular Steel Main Frame • 7" x 4" Receiver Tube • 6" x 4" Tubular Steel Crossmembers Under Center and Rear Bolsters • 3" Structural C-Channel Crossmembers on 14 1/2" Centers Under Cargo Bed Floor
CARGO BED	<ul style="list-style-type: none"> • Interior Dimensions: 142'L x 64"W x 15"H with Reinforced Fold Down Tailgate • Floor: 1/8" Smooth Steel Construction • Sidewalls: 12 Gauge Formed in Brake for Added Strength • Tailgate: Tubular Construction, w/ Offset Hinges so Debris is Easily Cleared • (4) four - 5/8" D-Rings, 9000 lbs. Capacity each, Floor Mounted (1) one each Corner

PT122-6K, COMBINATION POLE TRAILER

STANDARD EQUIPMENT AND SPECIFICATIONS

FENDERS & CATWALK	<ul style="list-style-type: none">• Fabricated 1/8" Steel Diamond Tread Plate Fender Construction• (4) four - Roll-Off Fender Guards, Prevents Damage to Fenders when "Wrecking"
TOOL BOX	<ul style="list-style-type: none">• Tool Box Dimensions: 14"H x 14"D x 64"W Contoured to A-Frame• Fabricated from 1/8" Smooth Steel Integrated Construction• (2) Side Entry Doors Key Locked with Twist Latches• Weather Tight Rubber Gaskets
12 VOLT WIRING SYSTEM	<ul style="list-style-type: none">• ICC & DOT Approved Lights• Sealed Beam Rubber Mounted Stop, Turn, Tail and Marker Lights• S.O. Cable Wiring Loom, Clamped on 16" Centers with Rubber Lined Clamps• Wiring Loom Terminated in Junction Boxes• Connections Soldered and Sealed with Heat Shrink Tubing• Stretch Coil Cord with Retainer on Extendible Tongue• 36" Pigtail w/ 6-Way Aluminum Die Cast Plug, Terminated at Junction Box• 6-Way Aluminum Die Cast Plug (Truck Side) in Rear Butt Tube for Light Bar Hook-Up• Breakaway Kit with Sealed Lead Acid Battery & Trickle Charger
PAINT	<ul style="list-style-type: none">• Trailer is Completely Sandblasted• Seams are Sealed with Paintable Caulk• Rust Prohibitive Two-Part Epoxy Polyamide Primer• Two-Part Acrylic Polyurethane Topcoats (Standard Colors White and Safety Yellow)• All Attachments Painted before Assembly and Installed with Serviceable Fasteners



PICTURED WITH OPTIONAL REEL ASSEMBLIES

OPTIONAL LENGTH VARIATION

Model PT122-6KXL
Length Adjustments: 24' / 31' / 38'
Bed Length - 12' x 64"W x 15"H
7"X3"X1/4"W Wall Extension Tongue
Full Width Squared-off Tool Box, (14"H x 24"D x 64"W)
Fixed Front Bolster

AXLE OPTIONS

7000 lb. Tandem – Payload: 12,000 lbs. GVWR 15,000 lbs.
12" x 2" Electric Brakes
(4) four - ST235/80R16 LR-E, (14 Ply) Capacity 3,520 lbs.

8000 lb. Tandem – Payload: 13,500 lbs. GVWR 16,500 lbs.
12 1/4" x 3 3/8" Electric Brakes
(4) four - 215/75R/17.5 LR-H, Capacity 4,805 lbs.

OPTIONAL SPARE TIRE & WHEEL

ST235/85R16 LR-E (6K Axle)
ST235/80R16 LR-E (7K Axle)
215/75R/17.5 LR-H (8K Axle)
Rubber Wheel Chocks, 7"H x 10"L x 8"W

FRONT BOLSTER OPTIONS (MOUNTED ON EXTENDABLE TONGUE)

64"W Tubular Bolster,
Pole Stops, Winch Binder and Nylon Strap (In Lieu of 45" Front Bolster)

U-Type Single Pole Cradle
Winch Binder and Nylon Strap (In Lieu of 45" Front Bolster)

60"W (45" ID) 3" Double C-Channel Bolster,
Winch Binder and Nylon Strap (In Lieu of 45" Front Bolster):
with 9" Chain Adjusted Stanchions
with 21" Lever Lock Stanchions

(4) - 30' L Nylon Winch Strap in Lieu of 15'

OPTIONAL REMOVABLE BOLSTERS (CENTER & REAR)

89' W Removable 3" Double C-Channel Bolsters
Includes Your Choice of Stanchions:
with 9" Chain Adjusted Stanchions
with 21" Lever Lock Adjusted Stanchions

REMOVABLE REEL RACK OPTIONS

(1) pair - 36"H Reel Stands, with 3" Receivers Tubes (Standard Equipment)
(Reel Bar Not Included)

Additional (1) pair - 36"H Reel Stands with 3" Receivers Tubes
(Reel Bar Not Included)

Additional (1) pair – 3" Receiver Tubes Only

2 7/8" Reel Bar with (2) Locking Collars

Standard Reel Rack Package

(1) pair - 36"H Reel Stands

(1) pair - 3" Receiver Tubes

(1) 2 7/8" Reel Bar with (2) Locking Collars

Maximum Reel Size - 68"D x 50"W x 2,200 lbs. Capacity

Reel Rack with Bronze Bushings Package

(1) pair - 36"H Reel Stands with Bronze Bushings

(1) pair - 3" Receiver Tubes

(1) 2 7/8" Reel Bar with (1) Crossarm and (1) Locking Collar

Maximum Reel Size – 68"D x 50"W x 2,500 lbs. Capacity

OPTIONAL REEL RACKS WITH OVERSPIN / TENSIONING BRAKES

8" Overspin Brake Package

8" Brake w/ 8" x 7/16" Solid Bronze Disc, Cast Aluminum Caliper and Tension Adjusting Handle

(1) pair - 36"H Reel Stands with Bronze Bushings

(1) 2 7/8" Reel Bar with (1) Crossarm and (1) Locking Collar

Maximum Reel Size 68"D x 48"W x 2,500 lbs

12" Medium Duty Tensioning Brake Package

12" Tension Brake w/ 12" x 5/8" Solid Bronze Disc, Cast Steel Caliper and Tension Adjusting Handle

(1) pair - 36"H Reel Stands with Heavy Duty Bronze Bearings

(1) 2 7/8" Reel Bar with (1) Crossarm and (1) Locking Collar

Maximum Reel Size 68"D x 48"W x 3,000 lbs.

HITCH & JACK OPTIONS

3" Lunette Eye (In Lieu of 2 1/2" Eye)

Visible Registration Holder

Jack Handle Extension:

- Add to One Side
- Add to Both Sides (Requires Store-Away Handle)

CARGO BED OPTIONS

(4) - 9"D Open Top Storage Bins
Located Front and Rear of Fenders to Roll-Off Fender Guards

Additional D-Rings

Chains on Tailgate

WIRING & LIGHT BAR OPTIONS

Light Bar

(2) Rubber Mounted Sealed Beam Lights (Stop Turn and Tail)

36"L x 4" x 4" Tubular Steel Body

Chain Adjusted Mounting Base

25' of Cable with 6-Way Aluminum Die Cast Connector

Warner 6-Way Connector


in Lieu of Standard 6-Way Connector

Solar Charged Breakaway Kit

In Lieu of Standard Kit



Pictured with Removable Bolsters and 9" Stanchions

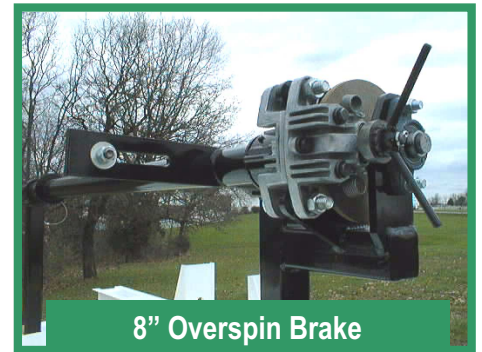

8" Overspin Brake



Light Bar



12" Tensioning Brake